

# Series 1001

- Test probe for 30 mil spacing
- Short travel
- Low contact pressure
- Receptacle pre-wired

## Mechanical Data

Center	0.76 mm / 30 mil
Full Travel	2.00 mm
Working Travel	1.35 mm
Pre-Loaded Spring Force	0.13 N
Spring Force at Working Travel	0.30 N

## Electrical Data

Max. Current Rating	0.5 A
Typical Continuity Resistance	≤ 150 mOhm

## Materials

Barrel	Bronze, gold plated
Spring	Stainless Steel, gold plated
Plunger	Steel, gold plated
Receptacle	Bronze, gold plated
Wire AWG 32 (Blue)	Copper, silver plated, insulated

## Recommended Diameter of Drill

HP 2361.1 (Trolitax)	0.53 mm
----------------------	---------


## Tip Style · Diameter · Plating




**G3**

0.28 Au

1001

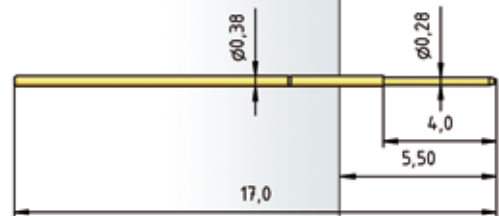

H 1001 V700

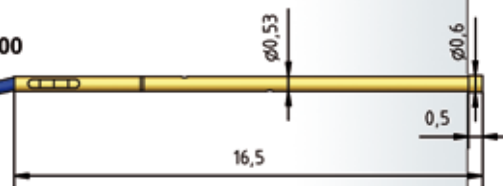

## How to Order

**1001 - G3 - 0.3 N - Au - 0.28**

1 2 3 4 5

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter