

Series 1015.50

- Universal field of application
- Contacting of assembled PCBs

Mechanical Data

Center	2.54 mm / 100 mil
Full Travel	4.20 mm
Pre-Loaded Spring Force	0.35/ 0.50/ 0.70 N
Spring Force at Full Travel	1.00/ 1.50/ 2.50 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	≤ 50 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Stainless Steel, unplated
Plunger	CuBe, rhodium plated
Receptacle	Bronze, gold plated

Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.66 mm
with pressed-in Ring	1.81 mm
HGW 2372 (Glass filled Material)	1.67 mm
with pressed-in Ring	1.82 mm


Tip Style · Diameter · Plating




A

1.35C Rh


1015.50

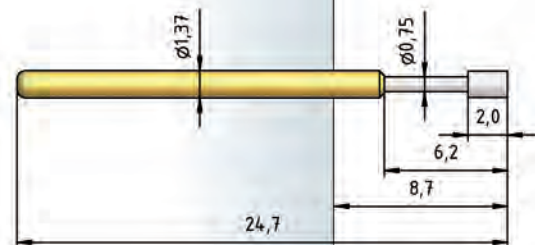

H 1015.50 WT7

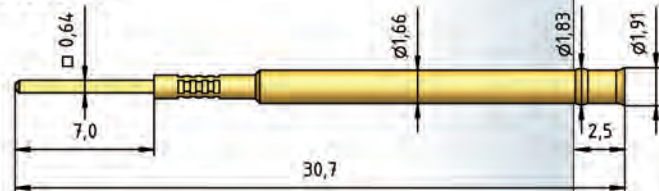

H 1015.50 WT9

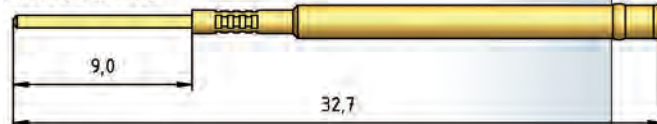

How to Order

1015 .50 - A - 1.5 N - Rh - 1.35 C

1 2 3 4 5 6 7

1. Series 2. Variant 3. Tip Style 4. Spring Force 5. Tip Plating 6. Tip Diameter
7. Tip Material (only for CuBe)