

Series 5310/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available


Mechanical Data	
Center	2.54 mm / 100 mil
Full Travel	4.50 mm
Working Travel	3.50 mm
Pre-Loaded Spring Force	0.30 N
Spring Force at Working Travel	1.50 N

Electrical Data	
Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	≤ 20 mOhm

Materials	
Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel, CuBe
Receptacle	Brass, gold plated

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	2.00 mm
HGW 2372 (Glass filled Material)	2.03 mm

Tip Style · Diameter · Plating				
				
A	B	C	D1	H
2.00C Au	1.00 Au	2.00C Au	0.80 Au	1.00 Au

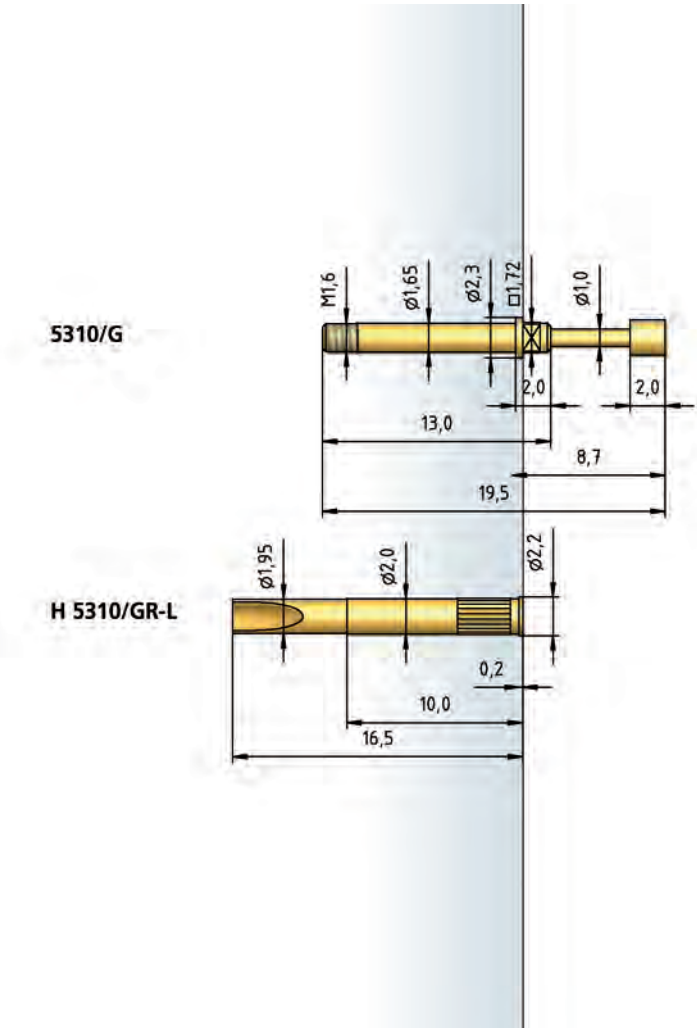

How to Order						
5310/	G	-	A	-	1.5 N	- Au - 2.0 C
1	2	3	4	5	6	7
1. Series 2. Threaded Design 3. Tip Style 4. Spring Force 5. Tip Plating 6. Tip Diameter 7. Tip Material (only for CuBe)						