

Series 1025.21

- For testing HP Testjet or Teradyne Frame Scan Applications
- Tip with spring
- Compensation of possible tilt of the Sensor Plate on the device

Mechanical Data

Temperature Range	-30 °C - +120 °C
Full Travel	4.80 mm
Working Travel	4.40 mm
Pre-loaded Spring Force	0.50 N
Spring Force at Working Travel	1.40 N

Electrical Data

Max. Current Rating	3.0...5.0 A
Typical Continuity Resistance	<= 20 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	CuBe, gold plated
Testjet Spring	Bronze, gold plated

Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.65 mm
with pressed-in Ring	1.75 mm
HGW 2372	1.67 mm
with pressed-in Ring	1.76 mm


Tip style - Diameter - Plating



TJ

1.35/2.65C Au

1025.21

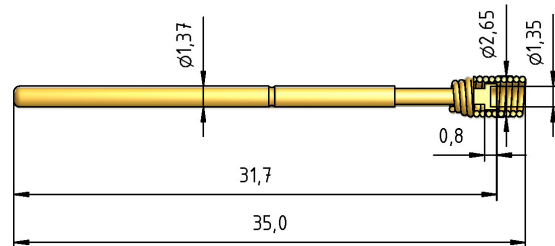

How to Order

1025.21 - TJ - 1.40 N - Au 1.35 - /2.65 C

1 2 3 4 5 6 7

1. Series
2. Tip Style
3. Spring Force
4. Tip Plating
5. Inner Tip Diameter
6. Outer Tip Diameter
7. Tip Material (only for CuBe)