

# Series 1060 • 1060/G

- For use in burn-in and run-in test
- Transmission of high currents
- Low contact resistance

### Mechanical Data

Center	4.00 mm / 160 mil
Full Travel	5.50 mm
Working Travel	4.40 mm
Pre-Loaded Spring Force	0.80 N
Spring Force at Working Travel	3.00 N

### Electrical Data

Max. Current Rating	24.0 A
Typical Continuity Resistance	≤ 10 mOhm

### Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	CuBe, gold plated / Silver Cap
Receptacle	Brass, gold plated

### Recommended Diameter of Drill

#### H 1050 L, H 1060/G-L





HP 2361.1 (Trolitax)	2.99...3.00 mm
HGW 2372 (Glass filled Material)	3.00 mm

#### H 1060/GRV-L

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372 (Glass filled Material)	3.01 mm

### Tip Style · Diameter · Plating

<b>AX</b>	<b>A6X</b>	<b>BAX</b>	<b>CX</b>	<b>DX</b>
3.00C Au	3.00C Au	1.80C Au	2.30C Au 3.00C Au 4.00C Au	2.30C Au 3.00C Au
<b>DX</b>	<b>DX1</b>	<b>D3X</b>	<b>FX</b>	<b>GX</b>
1.00C Au 1.40C Au	3.00C Au	3.00C Ag	2.30C Au 4.00C Au 6.00C Au	2.50C Au
<b>HX</b>	<b>H1X</b>	<b>KX</b>		
1.80C Au	1.30C Au	3.00C Au		

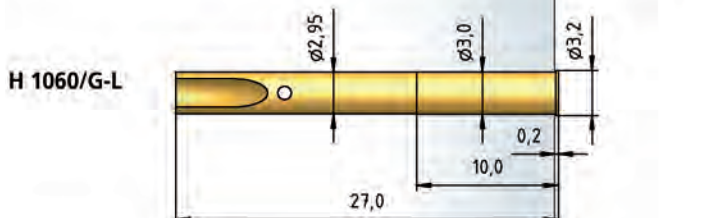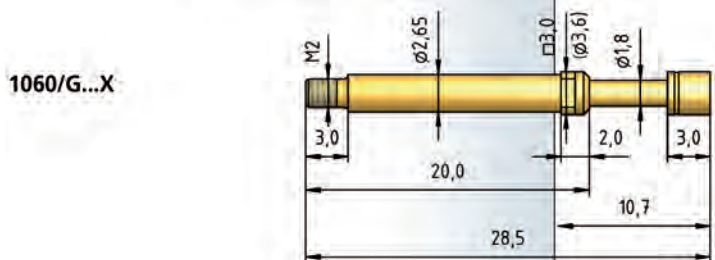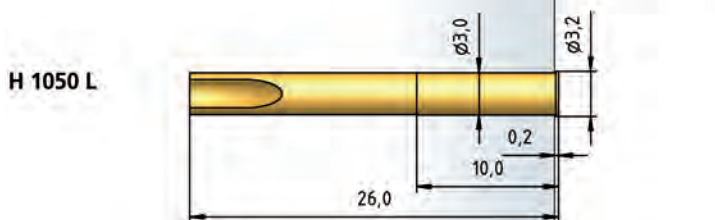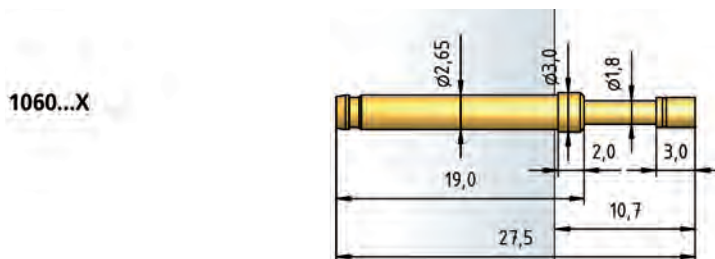

This receptacle is sealed vacuum-tight when a wire is soldered on.  
**Important:** If too much solder is used there is a risk that it will get into the tread.

### How to Order

**1060/G - FX - 3.0 N - Au - 4.0 C**

1. Series 2. Threaded Design 3. Tip Style 4. Spring Force 5. Tip Plating  
6. Tip Diameter 7. Tip Material (only for CuBe)