

Series 1013/Z

- International standard for 75 mil applications
- Contacting of assembled PCBs
- Spring travel 12.0 mm


Mechanical Data	
Center	1.91 mm / 75 mil
Full Travel	12.00 mm
Working Travel	9.60 mm
Pre-Loaded Spring Force	0.40/ 0.35 N
Spring Force at Working Travel	1.20/ 1.60 N

Electrical Data	
Max. Current Rating	3.0 A
Typical Continuity Resistance	≤ 30 mOhm

Materials	
Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Bronze, gold plated

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	1.30 mm
with pressed-in Ring	1.36 mm
HGW 2372 (Glass filled Material)	1.32 mm
with pressed-in Ring	1.37 mm

Tip Style · Diameter · Plating				
				
C	H	Q	Q	V
1.15 Au	1.15 Au	0.64 Au	1.15 Au	0.64 Au

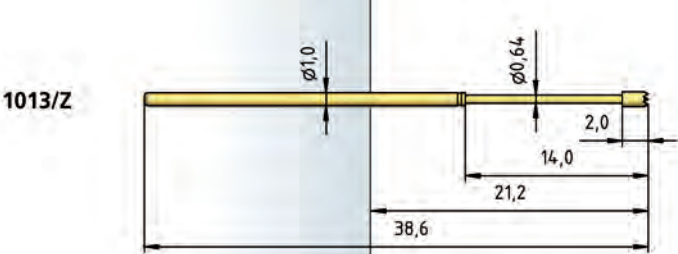

Receptacles see page 58

How to Order

<u>1013/Z</u>	-	<u>C</u>	-	<u>1.6 N</u>	-	<u>Au</u>	-	<u>1.15</u>
1		2		3		4		5

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter