

# Series 1010/G

- Test probe for cable harness testing
- Screwable - threaded design
- Screwing tools available

## Mechanical Data

Center	1.91 mm / 75 mil
Full Travel	3.00 mm
Working Travel	2.40 mm
Pre-Loaded Spring Force	0.20 N
Spring Force at Working Travel	0.80 N

## Electrical Data

Max. Current Rating	3.0...4.0 A
Typical Continuity Resistance	≤ 20 mOhm






## Materials

Barrel	Brass, gold plated
Spring	Stainless Steel, gold plated
Plunger	Steel, CuBe
Receptacle	Brass, gold plated






## Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.25 mm
HGW 2372 (Glass filled Material)	1.26 mm



## Tip Style · Diameter · Plating

				
<b>A</b>	<b>B</b>	<b>B1</b>	<b>C</b>	<b>D</b>
1.50 Au	0.45 Au	0.70 Au	1.50C Au	0.50 Au


  

				
<b>D</b>	<b>DF</b>	<b>D2</b>	<b>D2</b>	<b>F</b>
0.65 Au 1.00 Au/Ni	1.00 Au	0.40 Au	0.60 Au	1.00 Au 1.50 Au


  

	
<b>G</b>	<b>H</b>
1.50 Rh	1.50C Ni

1010/G

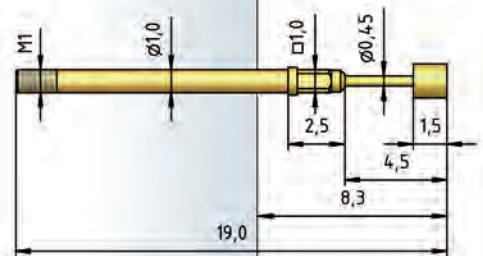

H 1010/GR-L

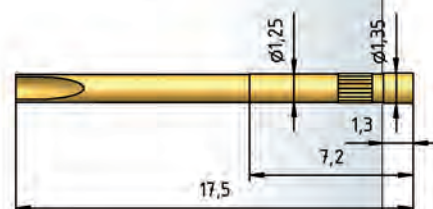

H 1010/GRV-L



Beim Anlöten eines Drahtes wird diese Hülse vakuumdicht verschlossen.  
**Achtung:**  
 Bei Überdosierung von Lot besteht die Gefahr des Verlötnens des Gewindes.

## How to Order

1010/ G - D - 0.8 N - Au - 1.0 C  
 1 2 3 4 5 6 7

1. Series 2. Threaded Design 3. Tip Style 4. Spring Force 5. Tip Plating  
 6. Tip Diameter 7. Tip Material (only for CuBe)