

# Series 1015

- Universal field of application
- Contacting of assembled PCBs
- Wide variety of types

## Mechanical Data

Center	2.54 mm / 100 mil
Full Travel	4.40 mm
Working Travel	3.50 mm
Pre-Loaded Spring Force	0.25/ 0.40/ 0.40/ 0.30/ 0.70/ 0.60 N
Spring Force at Working Travel	0.70/ 1.00/ 1.50/ 1.70/ 2.50/ 3.00 N

## Electrical Data


Max. Current Rating	3.0 A
Typical Continuity Resistance	≤ 30 mOhm

## Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel, CuBe
Receptacle	Bronze, gold plated

## Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.67 mm
with pressed-in Ring	1.75 mm
HGW 2372 (Glass filled Material)	1.69 mm
with pressed-in Ring	1.76 mm

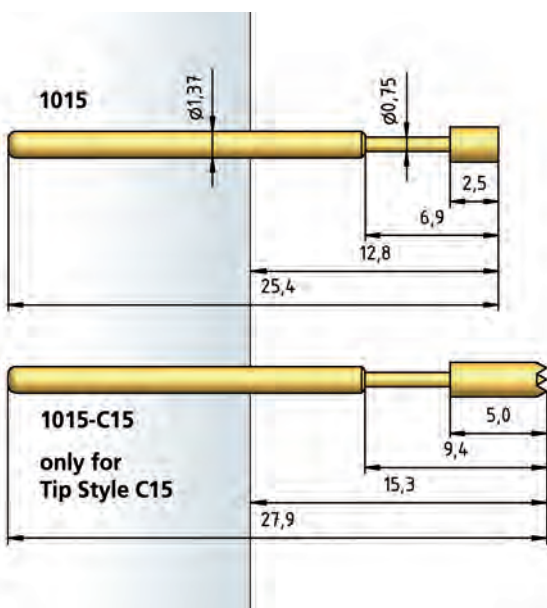

## How to Order


1015 - C - 1.5 N - Au - 1.8 C

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter  
6. Tip Material (only for CuBe)

## Tip Style · Diameter · Plating

<b>A</b> 1.80 Au/Ni	<b>B</b> 0.75 Au/Rh/Ni	<b>BS</b> 0.38 Au	<b>C</b> 1.00 Au 1.30C Au 1.80C Au/Ni	<b>C15</b> 1.80 Au
<b>C15</b> 0.90/1.37 Au/HTK	<b>C2S</b> 1.20/1.80 Au/HTK	<b>D</b> 0.50 Ni 0.65C Au/Ni 0.75 Au/Rh	<b>D</b> 1.25 Au/Ni	<b>E</b> 1.80 Au/Ni
<b>F</b> 0.75 Rh	<b>F</b> 1.50C Au 1.80 Rh	<b>G</b> 1.30 Rh 1.80 Au/Ni	<b>H</b> 1.30 Rh 1.80 Au 3.00 Rh	<b>K</b> 1.80 Au/Ni
<b>Q</b> 0.75C Au				

## H 1015 C

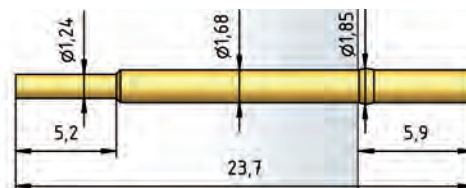


## H 1015 L



## H 1015 W



## H 1015 C-K

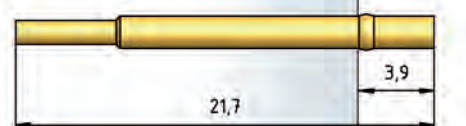

## H 1015 L-K



## H 1015 W-K



## H 1015 WR



## H 1015 WR-K

