

Series 1006

- Test probe for 40 mil centers
- Short travel
- Low contact force

Mechanical Data	
Center	1.02 mm/40 mil
Temperature Range	-30 °C - +120 °C
Full Travel	2.29 mm
Working Travel	1.27 mm
Pre-loaded Spring Force	0.17 N
Spring Force at Working Travel	0.37 N

Electrical Data	
Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 55 mOhm

Materials	
Barrel	Bronze, gold plated
Spring	Bronze, Stainless Steel, gold plated
Plunger	CuBe, gold plated
Receptacle	Bronze, gold plated


Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	0.71 mm
HGW 2372	0.75 mm

High-Temperature Applications	
Temperature Range	-40 °C - +250 °C
Pre-Loaded Spring Force	0.15 N
Spring Force at Working Travel (Order Index E)	0.45 N

Tip style - Diameter - Plating



B	D	G
0.53C Au	0.53C Au	0.53C Au

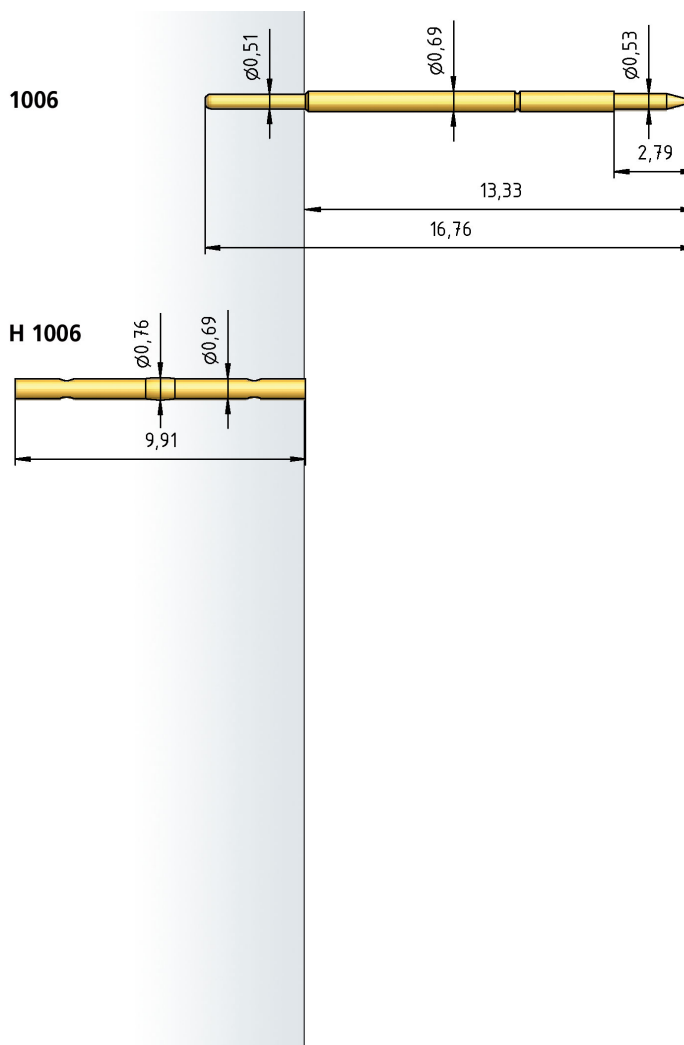

How to Order

1006 - B - 0.45 N E - Au - 0.53 C

1 2 3 4 5 6 7

- Series
- Tip Style
- Spring Force
- High Temperature
- Tip Plating
- Tip Diameter
- Tip Material (only for CuBe)