

# Series 1051 • 1061

- Stable design
- Increased installation height
- Contacting of assembled PCBs
- Universal applications

### Mechanical Data

Center	4.00 mm / 160 mil
Full Travel	7.00 mm
Working Travel	5.60 mm
Pre-Loaded Spring Force	0.15/ 0.25/ 0.40/ 0.60 N
Spring Force at Working Travel	0.70/ 0.80/ 1.50/ 3.00 N

### Electrical Data

Max. Current Rating	5.0 A
Typical Continuity Resistance	≤ 35 mOhm

### Materials

Barrel Brass, gold plated	
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Nickel Silver, unplated


### Recommended Diameter of Drill

HP 2361.1 (Trolitax)	3.00 mm
HGW 2372 (Glass filled Material)	3.01 mm

### Tip Style · Diameter · Plating



B	BA
1.80 Ni	1.80 Rh

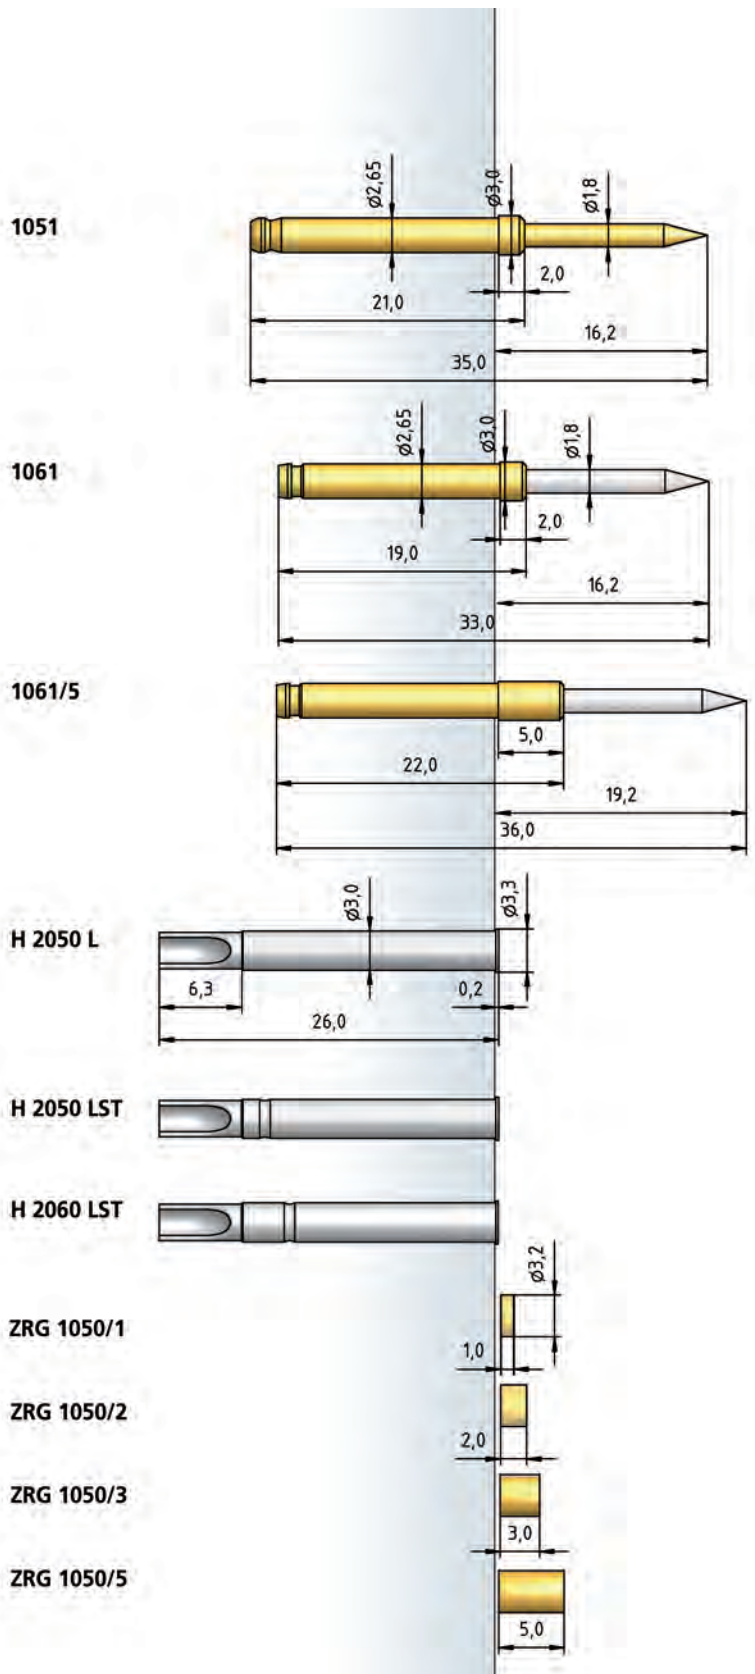

### How to Order

1051 - B - 1.5 N - Ni - 1.8

1 2 3 4 5

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter